



Securifor® 3D

The Securifor 3D system is a complete system developed to combine high security and aesthetic design.



Benefits

High security

The panels are heavy welded mesh with small rectangular apertures. Because of the large wire diameter (4mm) and the restricted size of mesh (12.7 x 76.2mm) Securifor 3D offers maximum security.

Attractive design

The horizontal V-folds make the Securifor 3D system ideally suitable for an environment where security and aesthetics go hand in hand.

Long lifetime

Betafence's coating technology is state of the art and guarantees a high longevity.


Good visibility

In spite of the small mesh aperture the see-through characteristics remain unimpaired when viewed head-on and even at an angle to the fence. This is particularly important for clear camera surveillance.

Complete system

Supplied as a complete system with panels, several post systems and gates.

Product detail

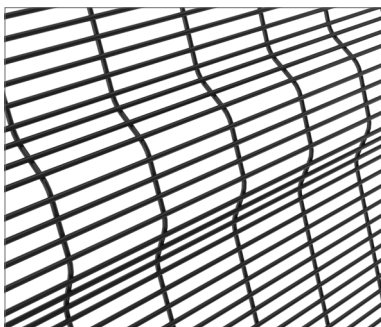


Functionalities




Security level

(when compared to other **high security panel** options)

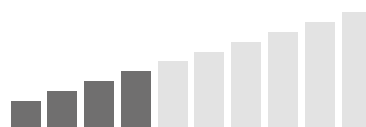


Post and fixing systems

(post shape illustrated below)



Securifor® Rectangular

Metal posts dimension **80 x 60 x 2.5mm** or **120 x 60 x 3mm** (depending on the post length) with plastic cap on top. The posts have a single row of M8 threaded inserts. The panels are fixed using specific spider fixators or full-length cover plates and one-way bolts.



Bekafix® Ultra

Metal posts dimension **70 x 44mm**, H-shape with hook plastic cap. Coating and post steel strength are higher, for corrosive environment or high fences. Panels are attached to the side of the posts using a metal fixator.

- For more information on the above posts, please refer to the relevant product page or flyer

Panels

The panels are heavy welded mesh, provided with horizontal V-folds. Width: 2518.6mm.

- Mesh size: 76.2 x 12.7mm
- Horizontal wire diameter: 4mm

Coating technique



Panels are made of pre-galvanised wire (minimum 25g/m²) and polyester top layer with a minimum a layer thickness of 100 microns. The PES coating thickness is the average of 10 measurements.

Colours

Green RAL 6005. Other colours are available on request.

Gates

The Securifor 3D system is supplied with matching gates using the same high security mesh infill as the fence. Single or double swing gate or sliding gate.

Securifor® 3D range		
Fence height (mm)	Panels width x height (mm)	Number of V-folds per panel
2000	2518.6 x 2010.6	2
2400	2518.6 x 2417.0	3
3000	2518.6 x 3001.2	3

Europe: Blokkestraat 34b,
B-8550 Zwevegem
Tel: B: +32 56 73 46 46

USA: 3309 SW Interstate 45,
Ennis, TX 75119
Tel: +1 972 878 7000

Middle East: P.O. Box 293517 DAFZA,
Building E 5, Block A 8th Floor, Office 802
Tel: +971 04 6091122

Africa: B10, Bergriver Business Park,
Paarl, 7646
Tel: +27 021 868 7300

Betafence is the world market leader in fencing solutions, access control and detection for perimeter protection. All Betafence companies and product names are trademarks owned by PRÆSIDIAD Group Limited. Modification in products and assortment are subject to change without prior notice.

Proud to be a PRÆSIDIAD brand. Betafence is part of a global network, working alongside Hesco as a leader in perimeter security systems and solutions. For more information please visit praesidiad.com.

BETAFENCE
Securing What Matters

betafence.com