



Securifor® B THRU POSTS

Rectangular post with fixing by means of a thin cover plate to accommodate the SECURIFOR® panels and allow a secure fence.

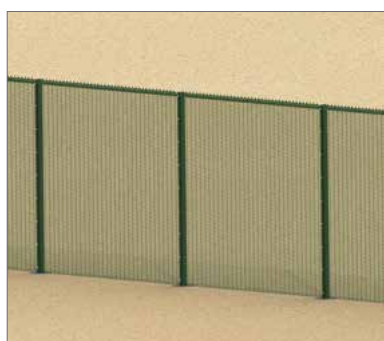

Product detail

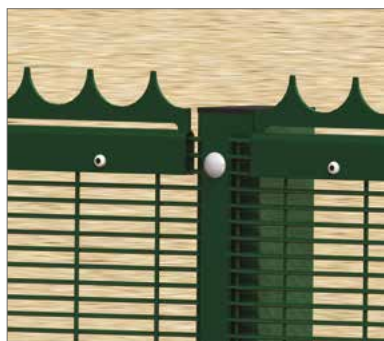

Compatible products

- Securifor® Flat
- Securifor® 2D
- Securifor® 4D

Benefits

- Tamper-Resistant Fixings
- High-Rigidity Construction
- Seamless Panel Integration

Profile

- Posts made of galvanised steel profiles
- Intermediate and end posts: 80 x 60 x 2.5mm with hole for frontal fixation of panels
- Corner posts: 80 x 60 x 2.5mm with one hole on two adjacent sides to insert two panels in an angle
- I/V: 15.1cm³

Fixing methods

- Flat steel cover plate 25 x 5mm
- The cover plate is fixed to the post using mushroom head square neck bolts M8, washers M8 and breaking off nuts M8 (for intermediate and end posts: M8 x 120, for corner posts: M8 x 100 / M8 x 120)

Options

- Posts with welded base plate
- Single, double-welded or bolted vertical extension arms to support three rows of barbed wire available to provide additional security
- Other non-standard post lengths and/or sections are available on request

Coating technique



Galvanised inside and outside (275g/m² – both sides combined) and polyester plastic coated (minimum 60 microns).

Colours

Green RAL 6005, Anthracite RAL 7016, Black RAL 9005, White RAL 9010.
Other colours are available on request.

Securifor® B THRU POSTS		
Panel height (mm)	Post section (mm)	Post length (mm)
2000	80 x 60 x 2.5	2600
2400	80 x 60 x 2.5	3100
3000	80 x 60 x 2.5	3700

Europe: Blokkestraat 34b,
B-8550 Zwevegem
Tel: B: +32 56 73 46 46

USA: 3309 SW Interstate 45,
Ennis, TX 75119
Tel: +1 972 878 7000

Middle East: P.O. Box 293517 DAFZA,
Building E 5, Block A 8th Floor, Office 802
Tel: +971 04 6091122

Africa: B10, Bergriver Business Park,
Paarl, 7646
Tel: +27 021 868 7300